



Installation Instructions Farmhouse Sink

General Recommendations:

Please read installation and maintenance Instructions thoroughly.
Inspect your sink for any noticeable damage before installation.
Check all local applicable plumbing and building codes.

These instructions are based on application to composite material or solid surface countertop installation only; countertop application to stone, marble, granite or butcher-block should be referred to an experienced counter top fabricator for custom installation.

Allora USA Farmhouse sinks are individually hand- crafted and Allora USA suggests using experienced and professional installers only. For custom cutting of countertop and installation of the actual sink, on-site installation is also recommended. Acceptable variances are approximately 1/8 of an inch. Alignment to the cut-out and precise application and trimming of any adhesive sealant are critical to a superior fit and finished look. Please take extra care in this regard.

Allora USA Farmhouse sinks require custom order cabinets. Consult your cabinet dealer.

Allora USA does not accept any liability for damage to countertop, sink fixture, faucet or personal injury during installation. Warranty is void if installation instructions are not followed.

Tools and Materials needed:

Tape Measure	Farming Square	Eye Protection
Hacksaw	Ear Protection	Silicone Adhesive Sealant
Rags	Shims	Wood Braces
Pencil (NOT ink)	Denatured Alcohol	

Be sure to use proper tools and always wear personal safety devices for your protection.

Installation Options:

Farmhouse sinks offer installation options depending on your design

Undermount Installation

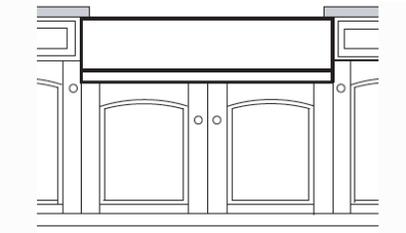


Figure 1

Flush Mount Installation




Figure 2

Built up Installation

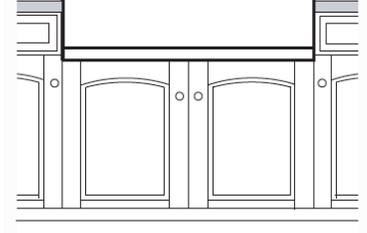


Figure 3

Caution: All Installation types need to allow room for faucet installation. Ensure adequate clearance behind the sink for any faucet and backsplash, as well as full range of motion for faucet spouts and handles.

Typical Under mount installation with 1/4" reveal recommended.

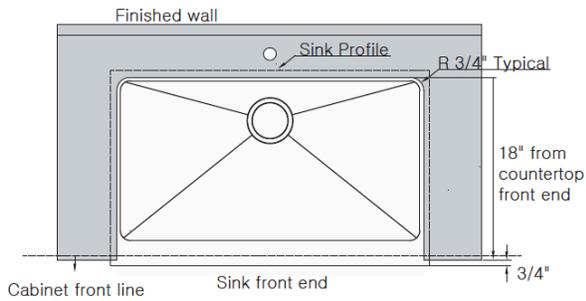


Figure 4




Figure 5

Typical Flush Mount and built up installation

Built-up installation may expose sink sides to be raised up to 1" above the countertop

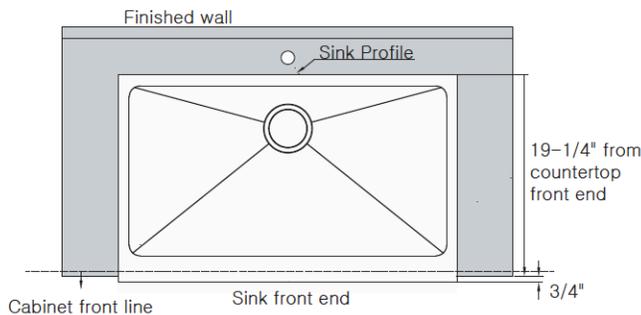


Figure 6

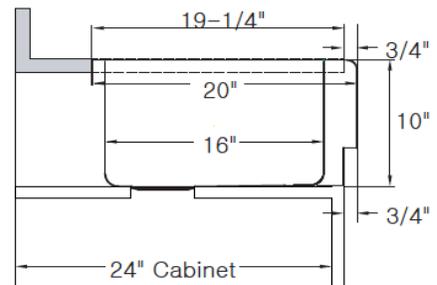


Figure-7

1. Prepare the Sink Base Cabinet

Farm house sinks require custom order sink base cabinets with a front cutout to accommodate a 10" deep sink. Build a plywood platform on a support frame inside of the sink base cabinet. Platform must support the weight of the sink and any attachments such as garbage disposals. When the sink is placed into a platform, make sure the top of the sink is evenly flush against the bottom of the countertop. Allow clearance for water supply line and drains or garbage disposal as necessary.

2. Make Template and Cutout.

Depending on the installation option, make proper cutout of the countertop.

Allora USA recommends a 1/4" reveal on 3 sides when installed undermount style.

For a flush mount or built up installation. Cut countertop along with outside line of the sink profile.

Front end of Farmhouse sinks is designed to be installed 3/4" extended out beyond the front end of the counter top. Cut countertop accordingly.

No template is provided due to the custom nature of each application and installation.


The actual sink is used as the template guide for each installation.

After centering the sink and allowing for any faucets and backsplashes, use pencil to outline the sink as your guide for the cutout, allowing for any reveal before the actual cutting.

3. Set the Sink

Set the sink on top of the cabinet or into the cabinet front cut out.

Apply sealant if necessary as a gasket between the sink and cabinet.

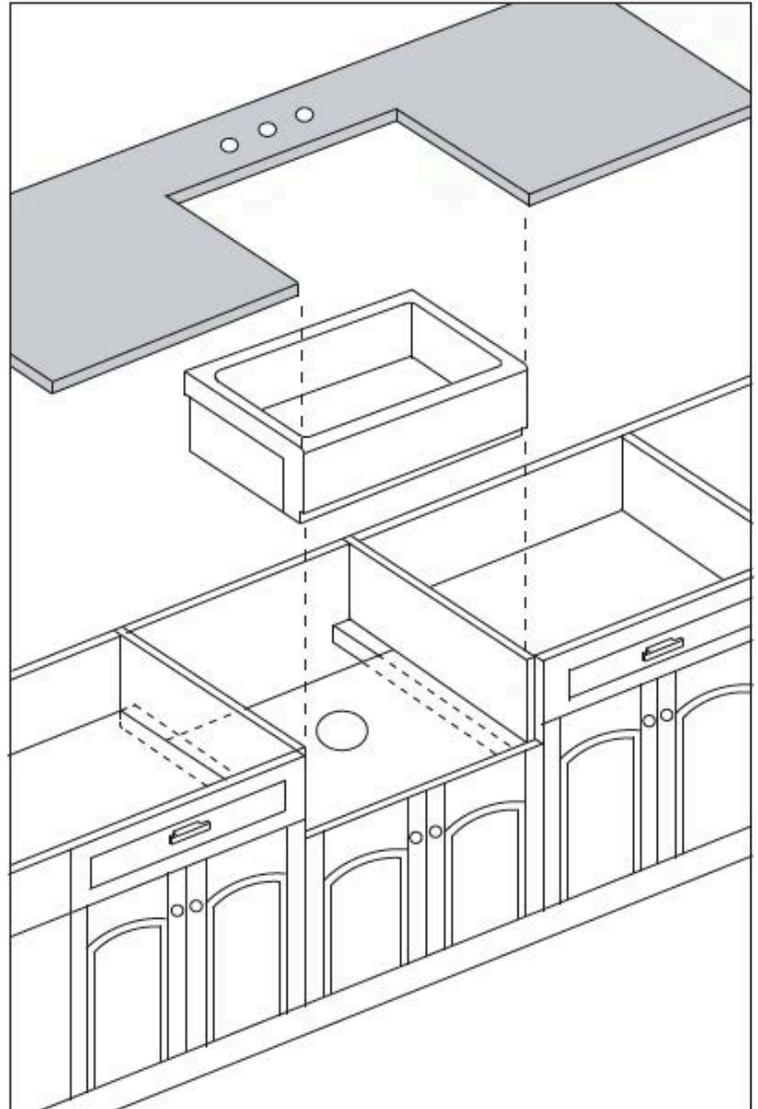

4. Install the Countertop

Carefully clean bottom of the countertop and top flange of sink with denatured alcohol. Apply bead of silicon adhesive (not supplied) around the top edge of the sink. Place countertop onto the sink. Remove excess sealant from the lip or any surfaces with a cleaner recommended by manufacturer of adhesive sealant.

Care and Maintenance

ALWAYS

- Clean everyday by thoroughly rinsing with a mild soap and warm water and wipe dry.
- Rub lightly with soft cloth in the direction of grain lines on a regular basis for additional preventive cleaning
- Keep the sink free of any standing water as this can cause a buildup of mineral deposit, which can affect the appearance of your sink.
- Any stubborn stains should be removed by scrubbing in the direction of the grain with a mild abrasive such as Bar Keeper's Friend. Always rinse the sink after using any cleaning agent and wipe dry.
- Clean any mineral deposits built up over time with a mild solution of vinegar and water followed by a thorough flushing with water.

NEVER

- ❖ Leave water spots, steel cookware, or utensils in the sink for lengthy periods; iron particles often develop rust spots in the stainless-steel surface.
- ❖ Use a steel wool or scoring pad as it damages the sink surface and causes discoloration.
- ❖ Let household cleaning agents or bleach sit in your sink for long periods of the time as this may ruin the finish of your sink.
- ❖ Leave rubber mats sponges, or cleaning pads in the sink overnight as this will trap water and could stain and discolor the sink surface.
- ❖ Use any drain cleaning products containing sulfuric or hydrochloric acid as this will attack the sink.
- ❖ Silver cleaners can also contain acids that will damage the sink surface.
- ❖ Use the inside of the sink as a cutting surface.

Lifetime Limited Warranty

Allora USA stainless steel sinks are produced to the highest manufacturing standards and are covered by lifetime warranty that protects the original purchaser against any defects in materials and workmanship under normal use. If upon determination by Allora USA that the sink is defective, Allora USA will replace without charge, with an equivalent sink or refund will be sent to the original purchaser that it has been used in a residential application and installed, used and maintained according to the instructions supplied with the sink and not damaged due to abuse, misuse, or negligence. This warranty will not cover any labor charges incurred in installation, removal replacement or repair, transportation cost or any consequential damages, which might be caused by the product. Allora USA shall not be liable in case of

- Improper installation or modification of original product.
- Damages resulting from abuse, such as scratches by dropping heavy objects in to the sink
- Scratches resulting from scrubbing with steel wool, abrasive pads or cleaners
- Improper application such as exposure to corrosive chemicals, or photographic solutions.
- Any commercial application.

If the original purchaser finds a defect in material or workmanship please contact 1-888-MY-ALLORA. Please include proof of purchase-save sales receipt. The law in some states may expand or modify this warranty. This warranty supersedes all other warranties, expressed or implied.

Allora USA, 22713 Commerce Center Court Suite 140, Dulles VA-20166, Phone: 571-291-3484 www.alloraus.com